


# Socket Countersunk Screw DIN 7991 A4

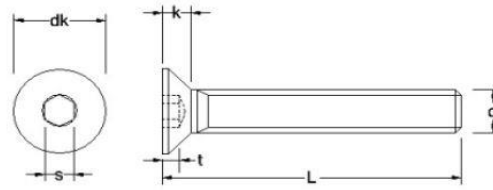

Length/Diameter	M4	M5	M6	M8	M10	M12	M16	M20	M24
dk(Max)	8	10	12	16	20	24	30	36	39
k (Max)	2.3	2.8	3.3	4.4	5.5	6.5	7.5	8.5	-
Pitch	0.7	0.8	1	1.25	1.5	1.75	2	2.5	3
s	2.5	3	4	5	6	8	10	12	14
t (Min)	1.8	2.3	2.5	3.5	4.4	4.6	5.3	5.9	10.3

Length/Diameter	M4	M5	M6	M8	M10	M12	M16	M20	M24
8	x	x							
10	x	x	x	x					
12	x	x	x	x					
16	x	x	✓	x					
20	x	x	x	x	x				
25	x	x	x	x	x	x			
30	x	x	x	x	x	✓	✓		
35	x	x	x	x	x	x	x	x	x
40	x	x	x	x	x	x	x	x	x
45		x	x	x	x	x	x	x	x
50		x	x	x	x	x	x	x	x
60		x	x	x	x	✓	x	x	x
70			x	x	x	✓	x	x	x
75			x	x	x	x	x	x	x
80			✓	✓	✓	x	x	x	x
90			x	x	x	x	x	x	x
100								x	x
110									
120									
130									
140									
150									
160									
170									
180									
190									
200									

✓ = Indicates sizes normally available from stock or on short lead time.  
 x = Indicates sizes available to order (subject to minimum order quantity)