


Angled brad nails

16 gauge angled brad nails for all second fix applications

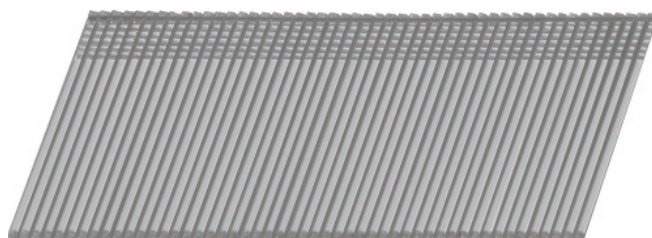

Product information

Features and benefits

- Smooth nail shank for low penetration resistance
- Chisel point to prevent timber from splitting
- T type head provides a concealed fixing
- The glue laminated collation ensures a lack of residue in the tool and on the work surface
- Available in galvanised or stainless steel for higher corrosion protection
- Compatible with all leading manufactures 16ga tools

Corresponding products

- R-RAWL-A2064 Gas powered second fix nailer

Applications

- Installation of wooden facades and other external trim applications
- Installation of soffits and other roof finishing elements
- Installation of timber decorative elements on facades and other timber structures
- Installation of skirting, architraves and other internal trim

Base materials

- Timber
- Plywood
- Chipboard
- Wood

Attention



Technical Data

Index	Gauge	Length	Finish	Collation	Fasteners per strip	Carton quantity	Fuel cells per carton	Box weight	Outer weight	EAN
		[mm]			[pcs]	[pcs]	[pcs]	kg	kg	
BRADS2032	16 Gauge	32	Galvanised	20° glue laminated	50	2000	2	1.18	1.18	5010445004667
BRADS2038	16 Gauge	38	Galvanised	20° glue laminated	50	2000	2	0.60	0.60	5010445004674
BRADS2045	16 Gauge	45	Galvanised	20° glue laminated	50	2000	2	0.80	0.80	5010445004681
BRADS2050	16 Gauge	50	Galvanised	20° glue laminated	50	2000	2	1.72	1.72	5010445004698
BRADS2050SS	16 Gauge	50	Stainless Steel	20° glue laminated	50	2000	2	1.76	1.76	5010445004728
BRADS2064	16 Gauge	64	Galvanised	20° glue laminated	50	2000	2	1.00	1.00	5010445004704