


Socket Button Screws ISO 7380-1 A2

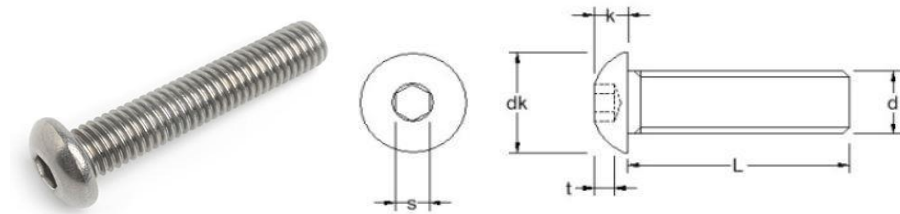

| Length/Diameter | M3 | M4 | M5 | M6 | M8 | M10 | M12 |
|-----------------|------|-----|------|------|------|------|------|
| dk(Max) | 5.7 | 7.6 | 9.5 | 10.5 | 14 | 17.5 | 21 |
| k (Max) | 1.65 | 2.2 | 2.75 | 3.3 | 4.4 | 5.5 | 6.6 |
| Pitch | 0.5 | 0.7 | 0.8 | 1 | 1.25 | 1.5 | 1.75 |
| s | 2 | 2.5 | 3 | 4 | 5 | 6 | 8 |
| t (Min) | 1.04 | 1.3 | 1.56 | 2.08 | 2.6 | 3.12 | 4.16 |

| Length/Diameter | M3 | M4 | M5 | M6 | M8 | M10 | M12 |
|-----------------|----|----|----|----|----|-----|-----|
| 3 | | | | | | | |
| 4 | | | | | | | |
| 5 | | | | | | | |
| 6 | ✓ | | | | | | |
| 8 | ✓ | | | | | | |
| 10 | ✓ | ✓ | ✓ | | | | |
| 12 | ✓ | ✓ | ✓ | ✓ | ✓ | | |
| 16 | ✓ | ✗ | ✓ | ✓ | ✓ | | |
| 20 | ✗ | ✗ | ✓ | ✓ | ✓ | ✓ | |
| 25 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| 30 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 40 | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 50 | | | ✓ | ✗ | ✓ | ✓ | ✓ |
| 60 | | | ✓ | ✓ | ✗ | ✗ | ✓ |
| 70 | | | | | ✗ | ✗ | ✗ |
| 80 | | | | | ✓ | ✓ | ✓ |
| 90 | | | | | | | |
| 100 | | | | | | | |
| 110 | | | | | | | |
| 120 | | | | | | | |

✓ = Indicates sizes normally available from stock or on short lead time.
 ✗ = Indicates sizes available to order (subject to minimum order quantity)